JASTAR

Shanghai Jastar Industrial Co., Ltd.

PRODUCT CATALOG

2026 EDITION



Instant Electric Water Heaters

Instant Hot Water Taps

Bathroom & Desk Heaters

15+ years in heating appliances

6,500 sqm production base

CE RoHS **CE & RoHS** backed

100% inspected before shipment

OEM / ODM manufacturer

www.jastarltd.com

sales@jastarltd.com

+86 199 2116 6185
(Phone / WhatsApp / WeChat)

HQ: Shanghai · Factory: Cixi & Jiaxing, Zhejiang, China

Instant Electric Water Heaters

Instant electric water heaters (tankless) - shower & whole-flat use

GB-2



- Touch and Knob Control

Power:	8,800 W	Voltage:	220 V
Element:	Stainless steel cup	Product size:	220 × 88 × 360 mm
Carton:	12 pcs / 610 × 430 × 365 mm	Carton wt:	26 kg
IP:	IPX4	Colours:	White
Temp range:	30 - 55 °C	Connection:	Wired direct to a leakage breaker · 40 A breaker included

GB-3



- Three-Stage Variable Power

Power:	8,000 W	Voltage:	220 V
Element:	Stainless steel cup	Product size:	220 × 88 × 270 mm
Carton:	12 pcs / 645 × 310 × 500 mm	Carton wt:	24 kg
IP:	IPX4	Colours:	White
Temp range:	30 - 55 °C	Connection:	Wired direct to a leakage breaker · 40 A breaker included

GB-4



- Dual Shower Outlet

Power:	11,000 W	Voltage:	220 V
Element:	Stainless steel cup	Product size:	200 × 88 × 280 mm
Carton:	12 pcs / 645 × 310 × 505 mm	Carton wt:	26 kg
IP:	IPX4	Colours:	White
Temp range:	30 - 55 °C	Connection:	Wired direct to a leakage breaker · 50 A breaker included

GB-5



- LED Display
- Plug Standard to Order

Power:	5,500 W	Voltage:	220 V
Element:	Stainless steel cup	Product size:	185 × 55 × 265 mm
Carton:	16 pcs / 600 × 350 × 515 mm	Carton wt:	38 kg
IP:	IPX4	Colours:	White
Temp range:	30 - 55 °C	Connection:	Plug standard to order (EU / US / UK / AU / Africa)

GB-6



- Multi-Point Supply

Power:	8,800 W	Voltage:	220 V
Element:	Stainless steel cup	Product size:	200 × 70 × 290 mm
Carton:	12 pcs / 610 × 335 × 500 mm	Carton wt:	24 kg
IP:	IPX4	Colours:	White
Temp range:	30 - 55 °C	Connection:	Wired direct to a leakage breaker · 40 A breaker included

GB-7



- Glass Panel in Seven Colours
- Touch Control

Power:	3,500 / 5,500 W	Voltage:	110 / 220 V
Element:	Stainless steel cup	Product size:	210 × 65 × 360 mm
Carton:	12 pcs / 645 × 415 × 655 mm	Carton wt:	36 kg
IP:	IPX4	Colours:	White, Black, Blue
Temp range:	30 - 55 °C	Connection:	Plug standard to order (EU / US / UK / AU / Africa)

GB-8



White



Black

- Glass Panel
- Six Colours

Power:	3,500 / 5,500 W	Voltage:	110 / 220 V
Element:	Stainless steel cup	Product size:	200 × 70 × 290 mm
Carton:	12 pcs / 500 × 330 × 610 mm	Carton wt:	30 kg
IP:	IPX4	Colours:	White, Black
Temp range:	30 - 55 °C	Connection:	Plug standard to order (EU / US / UK / AU / Africa)

GB-12



- Dual Knob Control
- Built-in Booster Pump
- Stainless steel cup element rated 3,500-5,500 W
- Hot water in about 2 seconds

Power:	3,500 / 5,500 W	Voltage:	110 / 220 V
Element:	Stainless steel cup	Product size:	210 × 65 × 340 mm
IP:	IPX4	Colours:	White
Temp range:	30 - 55 °C		

GB-13



- Touch Temperature Control
- Built-in Booster Pump
- Stainless steel cup element rated 3,500-5,500 W
- Live readout

Power:	3,500 / 5,500 W	Voltage:	110 / 220 V
Element:	Stainless steel cup	Product size:	210 × 65 × 340 mm
IP:	IPX4	Colours:	White
Temp range:	30 - 55 °C		

GB-14



- Dark Glass Panel
- Dual Knob Control
- Booster Pump
- Stainless steel cup element rated 3,500-5,500 W

Power:	3,500 / 5,500 W	Voltage:	110 / 220 V
Element:	Stainless steel cup	Product size:	215 × 72 × 360 mm
IP:	IPX4	Temp range:	30 - 55 °C

GB-15



- White Glass Panel
- Touch Control
- Booster Pump
- Stainless steel cup element rated 3,500-5,500 W

Power:	3,500 / 5,500 W	Voltage:	110 / 220 V
Element:	Stainless steel cup	Product size:	215 × 72 × 360 mm
IP:	IPX4	Colours:	White, Gold
Temp range:	30 - 55 °C		

GB-16



White White · square Black Black · square

- Tempered Glass Panel

Power:	5,500 W	Voltage:	220 V
Element:	Stainless steel cup	Product size:	185 × 60 × 265 mm
Carton:	16 pcs / 550 × 300 × 630 mm	Carton wt:	38 kg
IP:	IPX4	Colours:	White, White · square, Black, Black · square
Temp range:	30 - 55 °C	Connection:	Plug standard to order (EU / US / UK / AU / Africa)

GB-17



- Twin Knobs for Power and Temperature
- Stainless steel cup element rated 5.5 kW

Power:	5,500 W	Voltage:	220 V
Element:	Stainless steel cup	Product size:	215 × 72 × 360 mm
Carton:	12 pcs / 650 × 380 × 600 mm	Carton wt:	35 kg
IP:	IPX4	Colours:	White
Temp range:	30 - 55 °C	Connection:	Plug standard to order (EU / US / UK / AU / Africa)

GB-18



- Blue Glass Panel
- LED Display

Power:	5,500 W	Voltage:	220 V
Element:	Stainless steel cup	Product size:	215 × 72 × 360 mm
Carton:	12 pcs / 650 × 380 × 600 mm	Carton wt:	35 kg
IP:	IPX4	Colours:	Blue
Temp range:	30 - 55 °C	Connection:	Plug standard to order (EU / US / UK / AU / Africa)

GB-24



Rose White Black

- Oval Glass Panel
- Touch Control

Power:	3,500 / 5,500 W	Voltage:	110 / 220 V
Element:	Stainless steel cup	Product size:	200 × 65 × 310 mm
Carton:	12 pcs / 495 × 330 × 620 mm	Carton wt:	25 kg
Colours:	White, Rose, Black	Temp range:	30 - 55 °C
Connection:	Plug standard to order (EU / US / UK / AU / Africa)		

GB-25



Black



White

- Slim Arched Body
- Touch Control

Power:	3,500 / 5,500 W	Voltage:	110 / 220 V
Element:	Stainless steel cup	Product size:	190 × 70 × 305 mm
Carton:	12 pcs / 495 × 330 × 620 mm	Carton wt:	25 kg
Colours:	Black, White	Temp range:	30 - 55 °C
Connection:	Plug standard to order (EU / US / UK / AU / Africa)		

RYK-001



- Touch Panel
- Stainless Steel Cup Element
- 110 V / 3,500 W and 220 V / 5,500 W from one model

Power:	3,500 / 5,500 W	Voltage:	110 / 220 V
Element:	Stainless steel cup	Product size:	185 × 55 × 265 mm
Carton:	12 pcs / 710 × 350 × 530 mm	Carton wt:	26 kg
IP:	IPX4	Colours:	White
Temp range:	25 - 55 °C	Protection:	Water-electricity separation

RYK-002



- Wavy Glass Panel
- Touch Control
- Stainless steel cup element

Power:	3,500 / 5,500 W	Voltage:	110 / 220 V
Element:	Stainless steel cup	Product size:	185 × 55 × 265 mm
Carton:	12 pcs / 710 × 350 × 530 mm	Carton wt:	26 kg
IP:	IPX4	Colours:	White
Temp range:	25 - 55 °C	Protection:	Water-electricity separation

RYK-003



- Wavy Glass Panel
- Touch Control
- Four Uses

Power:	3,500 / 5,500 W	Voltage:	110 / 220 V
Element:	Stainless steel cup	Product size:	200 × 70 × 290 mm
Carton:	12 pcs / 710 × 350 × 530 mm	Carton wt:	26 kg
IP:	IPX4	Colours:	White
Temp range:	25 - 55 °C	Protection:	Water-electricity separation

RYK-004



- Glass Panel
- Wall or Under-Sink Installation
- Stainless steel cup element

Power:	3,500 / 5,500 W	Voltage:	110 / 220 V
Element:	Stainless steel cup	Product size:	200 × 70 × 290 mm
Carton:	12 pcs / 710 × 350 × 530 mm	Carton wt:	26 kg
IP:	IPX4	Colours:	White
Temp range:	25 - 55 °C	Protection:	Water-electricity separation

RYK-005



- Compact Vertical Body
- IPX4 Waterproof
- Stepless temperature control

Power:	3,500 / 5,500 W	Voltage:	110 / 220 V
Element:	Stainless steel cup	Product size:	200 × 70 × 290 mm
Carton:	12 pcs / 710 × 350 × 530 mm	Carton wt:	26 kg
IP:	IPX4	Colours:	White
Temp range:	25 - 55 °C	Protection:	Water-electricity separation


LZT-1



- LED Touch Panel

Power:	8,500 W	Voltage:	220 V
Element:	Cast aluminium	Product size:	240 × 55 × 360 mm
Carton:	6 pcs / 610 × 430 × 365 mm	Unit wt:	3.7 kg
Carton wt:	23 kg	IP:	IPX4
Colours:	Black, White, Grey, Blue	Temp range:	30 - 55 °C, stepless
Modes:	38 °C summer / 42 °C winter	Protection:	40 A leakage protector included

LZT-2

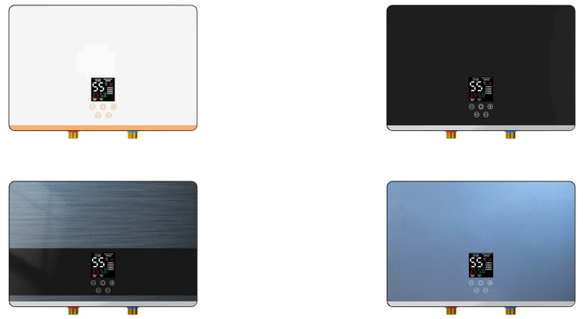

- LED Touch Panel

Power:	8,500 W	Voltage:	220 V
Element:	Cast aluminium	Product size:	360 × 55 × 240 mm
Carton:	6 pcs / 610 × 430 × 365 mm	Unit wt:	3.7 kg
Carton wt:	23 kg	IP:	IPX4
Colours:	Black, White, Grey, Blue	Temp range:	30 - 55 °C, stepless
Modes:	38 °C summer / 42 °C winter	Protection:	40 A leakage protector included

LZT-3



- Compact Body

Power:	7,000 W	Voltage:	220 V
Element:	Cast aluminium	Product size:	190 × 55 × 260 mm
Carton:	12 pcs / 610 × 325 × 580 mm	Unit wt:	2.4 kg
Carton wt:	29 kg	IP:	IPX4
Colours:	Black, White, Grey, Blue	Temp range:	30 - 55 °C, stepless
Modes:	38 °C summer / 42 °C winter	Protection:	40 A leakage protector included

LZT-3-3



- Shower Set Included
- Dual Voltage

Power:	3,500 / 5,500 W	Voltage:	110 / 220 V
Element:	Stainless steel cup	Product size:	185 × 55 × 265 mm
Carton:	12 pcs / 610 × 325 × 580 mm	Carton wt:	25 kg
IP:	IPX4	Colours:	White
Temp range:	30 - 55 °C	Connection:	Plug standard to order (EU / US / UK / AU / Africa)

Compact & mini water heaters · kitchen, basin & under-sink use

GB-1



- Dual Outlet for Basin and Shower
- Stainless steel tube element
- Hot water in about 3 seconds

Power:	3,500 W	Voltage:	110 / 220 V
Element:	Stainless steel tube	Product size:	250 × 80 × 135 mm
Carton:	24 pcs / 610 × 510 × 395 mm	Carton wt:	21 kg
IP:	IPX4	Colours:	White
Temp range:	25 - 55 °C	Protection:	Water-electricity separation

GB-9



- Compact Body for Basin and Kitchen
- Stainless steel tube element rated 3.5 kW

Power:	3,500 W	Voltage:	110 / 220 V
Element:	Stainless steel tube	Product size:	150 × 60 × 210 mm
Carton:	24 pcs / 495 × 495 × 430 mm	Carton wt:	33 kg
IP:	IPX4	Colours:	White, Black
Temp range:	30 - 55 °C	Connection:	Plug standard to order (EU / US / UK / AU / Africa)

GB-9-WG



- Compact Body
- Rotary Control

Power:	3,500 W	Voltage:	110 / 220 V
Element:	Stainless steel tube	Product size:	150 × 60 × 210 mm
Carton:	24 pcs / 562 × 495 × 390 mm	Carton wt:	24 kg
IP:	IPX4	Colours:	White, Black
Temp range:	30 - 55 °C	Connection:	Plug standard to order (EU / US / UK / AU / Africa)

GB-10



- Kitchen Point-of-Use
- 180 mm Wide

Power:	3,500 / 5,500 W	Voltage:	110 / 220 V
Element:	Stainless steel tube	Product size:	180 × 70 × 150 mm
Carton:	24 pcs / 565 × 500 × 400 mm	Carton wt:	26 kg
IP:	IPX4	Colours:	White
Temp range:	30 - 55 °C	Connection:	Plug standard to order (EU / US / UK / AU / Africa)

GB-11



- Flat Panel
- 2 mm² Cable

Power:	3,500 / 5,500 W	Voltage:	110 / 220 V
Element:	Stainless steel tube	Product size:	180 × 70 × 150 mm
Carton:	24 pcs / 565 × 500 × 400 mm	Carton wt:	26 kg
IP:	IPX4	Colours:	White
Temp range:	30 - 55 °C	Connection:	Plug standard to order (EU / US / UK / AU / Africa)

GB-19





- Compact Glass Panel
- 150 mm Wide

Power:	3,500 / 5,500 W	Voltage:	110 / 220 V
Element:	Stainless steel cup	Product size:	150 × 60 × 200 mm
Carton:	16 pcs / 460 × 350 × 510 mm	Carton wt:	29 kg
IP:	IPX4	Colours:	White, Black
Temp range:	30 - 55 °C	Connection:	Plug standard to order (EU / US / UK / AU / Africa)

GB-19-WG



- Compact Glass Panel
- Touch Control

Power:	3,500 W	Voltage:	110 / 220 V
Element:	Stainless steel cup	Product size:	150 × 60 × 200 mm
Carton:	24 pcs / 562 × 485 × 390 mm	Carton wt:	30 kg
IP:	IPX4	Colours:	White
Temp range:	30 - 55 °C	Connection:	Plug standard to order (EU / US / UK / AU / Africa)

GB-20





- Round Dial Control
- 140 mm Wide

Power:	3,500 / 5,500 W	Voltage:	110 / 220 V
Element:	Stainless steel cup	Product size:	140 × 60 × 180 mm
Carton:	16 pcs / 460 × 350 × 510 mm	Carton wt:	29 kg
IP:	IPX4	Colours:	White, Black, Grey
Temp range:	30 - 55 °C	Connection:	Plug standard to order (EU / US / UK / AU / Africa)

GB-21



- Under-Sink and Basin
- Copper Ports

Power:	3,500 / 5,500 W	Voltage:	110 / 220 V
Element:	Stainless steel cup	Product size:	140 × 60 × 180 mm
Carton:	24 pcs / 565 × 485 × 390 mm	Carton wt:	26 kg
IP:	IPX4	Colours:	White
Temp range:	30 - 55 °C	Connection:	Plug standard to order (EU / US / UK / AU / Africa)

GB-22



- Vertical Panel
- Copper Ports

Power:	3,500 / 5,500 W	Voltage:	110 / 220 V
Element:	Stainless steel cup	Product size:	140 × 60 × 180 mm
Carton:	24 pcs / 565 × 485 × 390 mm	Carton wt:	26 kg
IP:	IPX4	Colours:	White
Temp range:	30 - 55 °C	Connection:	Plug standard to order (EU / US / UK / AU / Africa)

GB-23



- Glass Panel
- Copper Ports

Power:	3,500 W	Voltage:	110 / 220 V
Element:	Stainless steel cup	Product size:	140 × 60 × 180 mm
Carton:	24 pcs / 565 × 485 × 390 mm	Carton wt:	40 kg
IP:	IPX4	Colours:	Black
Temp range:	30 - 55 °C	Connection:	Plug standard to order (EU / US / UK / AU / Africa)

GB-23-WG



- Glass Panel
- Copper Ports

Power:	3,500 W	Voltage:	110 / 220 V
Element:	Stainless steel cup	Product size:	140 × 60 × 180 mm
Carton:	24 pcs / 565 × 485 × 390 mm	Carton wt:	30 kg
IP:	IPX4	Colours:	Black
Temp range:	30 - 55 °C	Connection:	Plug standard to order (EU / US / UK / AU / Africa)

RY-021



- LCD Temperature Display
- Basin and Shower Outlet
- Stainless steel tube element

Power:	3,500 W	Voltage:	110 / 220 V
Element:	Stainless steel tube	Product size:	250 × 80 × 135 mm
Carton:	24 pcs / 610 × 510 × 395 mm	Carton wt:	21 kg
IP:	IPX4	Colours:	White
Temp range:	25 - 55 °C	Protection:	Water-electricity separation

RY-022



- LCD Display
- Flow-Rate Control

Power:	3,500 / 5,500 W	Voltage:	110 / 220 V
Element:	Stainless steel tube	Product size:	105 × 65 × 170 mm
Carton:	24 pcs / 562 × 485 × 390 mm	Carton wt:	31 kg
IP:	IPX4	Colours:	White
Temp range:	25 - 55 °C	Connection:	Plug standard to order (EU / US / UK / AU / Africa)

RYK-006



- Small Cylinder Body
- 191 mm
- Stepless temperature control

Power:	3,500 / 5,500 W	Voltage:	110 / 220 V
Element:	Stainless steel tube	Product size:	75 × 75 × 191 mm
Carton:	24 pcs / 710 × 350 × 530 mm	Carton wt:	36 kg
IP:	IPX4	Colours:	White
Temp range:	25 - 55 °C	Protection:	Water-electricity separation

RYK-007



- Gourd-Shaped Body
- 195 mm
- Stepless temperature control

Power:	3,500 / 5,500 W	Voltage:	110 / 220 V
Element:	Stainless steel tube	Product size:	94 × 70 × 195 mm
Carton:	24 pcs / 710 × 350 × 530 mm	Carton wt:	36 kg
IP:	IPX4	Colours:	White
Temp range:	25 - 55 °C	Protection:	Water-electricity separation

RYK-008



- 192 mm Slim Body
- LCD Display
- Under-sink / basin mounting

Power:	3,500 W	Voltage:	110 / 220 V
Element:	Stainless steel tube	Product size:	86 × 68 × 192 mm
Carton:	24 pcs / 495 × 495 × 420 mm	Carton wt:	20 kg
IP:	IPX4	Colours:	White
Temp range:	25 - 55 °C	Protection:	Water-electricity separation

RYK-009



- Small Rectangle Body
- 191 mm
- Stepless temperature control

Power:	3,500 / 5,500 W	Voltage:	110 / 220 V
Element:	Stainless steel tube	Product size:	105 × 68 × 191 mm
Carton:	24 pcs / 710 × 350 × 530 mm	Carton wt:	36 kg
IP:	IPX4	Colours:	White
Temp range:	25 - 55 °C	Protection:	Water-electricity separation

RYK-010



- Wide Voltage 110-220 V
- Compact Rectangle
- Stepless temperature control

Power:	3,500 / 5,500 W	Voltage:	110 / 220 V
Element:	Stainless steel tube	Product size:	105 × 68 × 191 mm
Carton:	24 pcs / 710 × 350 × 530 mm	Carton wt:	36 kg
IP:	IPX4	Colours:	White
Temp range:	25 - 55 °C	Protection:	Water-electricity separation

LZT-4



- Under-Sink & Kitchen
- Copper inlet & outlet
- Cast aluminium heating element
- Hot water in ~2 seconds

Power:	6,000 W	Voltage:	220 V
Element:	Cast aluminium	Product size:	210 × 51 × 150 mm
Carton:	16 pcs / 480 × 365 × 535 mm	Unit wt:	1.7 kg
IP:	IPX4	Temp range:	30 - 55 °C, stepless

Instant Hot Water Taps

JST-001



- LCD Temperature Display
- Bottom or Side Inlet

Power:	3,000 W	Voltage:	110 / 220 V
Element:	Stainless steel	Product size:	210 × 108 × 265 mm
Pack size:	210 × 108 × 265 mm	Carton:	24 pcs / 675 × 440 × 550 mm
Unit wt:	1.3 kg	IP:	IPX4
Pressure:	0.15 - 0.6 MPa	Connection:	G1/2" (DN15)
Inlet:	Bottom or side inlet		

JST-005



- Classic Curved Spout
- Bottom Inlet

Power:	3,000 W	Voltage:	110 / 220 V
Element:	Stainless steel	Product size:	180 × 108 × 255 mm
Pack size:	180 × 108 × 255 mm	Carton:	24 pcs / 645 × 400 × 540 mm
Unit wt:	1.2 kg	IP:	IPX4
Pressure:	0.15 - 0.6 MPa	Connection:	G1/2" (DN15)
Inlet:	Bottom inlet		

JST-007



- LED Temperature Display
- Bottom or Side Inlet

Power:	3,000 W	Voltage:	110 / 220 V
Element:	Stainless steel	Product size:	210 × 108 × 265 mm
Pack size:	210 × 108 × 265 mm	Carton:	24 pcs / 675 × 440 × 550 mm
Unit wt:	1.3 kg	IP:	IPX4
Pressure:	0.15 - 0.6 MPa	Connection:	G1/2" (DN15)
Inlet:	Bottom or side inlet		

JST-007-1



- Digital Display
- Bottom or Side Inlet

Power:	3,000 W	Voltage:	110 / 220 V
Element:	Stainless steel	Product size:	210 × 108 × 265 mm
Pack size:	210 × 108 × 265 mm	Carton:	24 pcs / 675 × 440 × 590 mm
Unit wt:	1.3 kg	IP:	IPX4
Pressure:	0.15 - 0.6 MPa	Connection:	G1/2" (DN15)
Inlet:	Bottom or side inlet		

JST-010



- Kitchen Sink
- Bottom Inlet

Power:	3,000 W	Voltage:	110 / 220 V
Element:	Stainless steel	Product size:	210 × 108 × 265 mm
Pack size:	210 × 108 × 265 mm	Carton:	24 pcs / 675 × 440 × 590 mm
Unit wt:	1.4 kg	IP:	IPX4
Pressure:	0.15 - 0.6 MPa	Connection:	G1/2" (DN15)
Inlet:	Bottom inlet		

JST-010-1



- Black & Steel Column
- Bottom Inlet

Power:	3,000 W	Voltage:	110 / 220 V
Element:	Stainless steel	Product size:	210 × 108 × 265 mm
Pack size:	210 × 108 × 265 mm	Carton:	24 pcs / 675 × 440 × 590 mm
Unit wt:	1.4 kg	IP:	IPX4
Colours:	Black	Pressure:	0.15 - 0.6 MPa
Connection:	G1/2" (DN15)	Inlet:	Bottom inlet

JST-011



- Square Chrome Column
- Bottom Inlet

Power:	3,000 W	Voltage:	110 / 220 V
Element:	Stainless steel	Product size:	210 × 108 × 265 mm
Pack size:	210 × 108 × 265 mm	Carton:	24 pcs / 675 × 440 × 590 mm
Unit wt:	1.3 kg	IP:	IPX4
Pressure:	0.15 - 0.6 MPa	Connection:	G1/2" (DN15)
Inlet:	Bottom inlet		

JST-011-1



- LED Digital Display
- Bottom Inlet

Power:	3,000 W	Voltage:	110 / 220 V
Element:	Stainless steel	Product size:	210 × 108 × 265 mm
Pack size:	210 × 108 × 265 mm	Carton:	24 pcs / 675 × 440 × 590 mm
Unit wt:	1.3 kg	IP:	IPX4
Pressure:	0.15 - 0.6 MPa	Connection:	G1/2" (DN15)
Inlet:	Bottom inlet		

JST-011-1GV



- Heating & Purification 2-in-1
- Bottom Inlet

Power:	3,300 W	Voltage:	110 / 220 V
Element:	Stainless steel	Product size:	350 × 108 × 320 mm
Pack size:	350 × 108 × 320 mm	Carton:	12 pcs / 590 × 360 × 650 mm
Unit wt:	1.6 kg	IP:	IPX4
Pressure:	0.15 - 0.6 MPa	Connection:	G1/2" (DN15)
Inlet:	Bottom inlet		

JST-011-2



- White Body LED Display
- Bottom Inlet

Power:	3,000 W	Voltage:	110 / 220 V
Element:	Stainless steel	Product size:	210 × 108 × 265 mm
Pack size:	210 × 108 × 265 mm	Carton:	24 pcs / 675 × 440 × 590 mm
Unit wt:	1.3 kg	IP:	IPX4
Colours:	White	Pressure:	0.15 - 0.6 MPa
Connection:	G1/2" (DN15)	Inlet:	Bottom inlet

JST-011-3



- 360° Flexible Spout
- Bottom Inlet

Power:	3,000 W	Voltage:	110 / 220 V
Element:	Stainless steel	Product size:	210 × 108 × 265 mm
Pack size:	210 × 108 × 265 mm	Carton:	24 pcs / 675 × 440 × 590 mm
Unit wt:	1.3 kg	IP:	IPX4
Pressure:	0.15 - 0.6 MPa	Connection:	G1/2" (DN15)
Inlet:	Bottom inlet		

JST-011-7



- Slim Column
- Bottom Inlet

Power:	3,000 W	Voltage:	110 / 220 V
Element:	Stainless steel	Product size:	210 × 108 × 265 mm
Pack size:	210 × 108 × 265 mm	Carton:	24 pcs / 675 × 440 × 590 mm
Unit wt:	1.2 kg	IP:	IPX4
Pressure:	0.15 - 0.6 MPa	Connection:	G1/2" (DN15)
Inlet:	Bottom inlet		

JST-011-8



- Gooseneck White Body
- Bottom Inlet

Power:	3,000 W	Voltage:	110 / 220 V
Element:	Stainless steel	Product size:	210 × 108 × 265 mm
Pack size:	210 × 108 × 265 mm	Carton:	24 pcs / 675 × 440 × 590 mm
Unit wt:	1.3 kg	IP:	IPX4
Colours:	White	Pressure:	0.15 - 0.6 MPa
Connection:	G1/2" (DN15)	Inlet:	Bottom inlet

JST-012



- Chrome LED Display
- Bottom or Side Inlet

Power:	3,000 W	Voltage:	110 / 220 V
Element:	Stainless steel	Product size:	210 × 108 × 265 mm
Pack size:	210 × 108 × 265 mm	Carton:	24 pcs / 675 × 440 × 550 mm
Unit wt:	1.3 kg	IP:	IPX4
Pressure:	0.15 - 0.6 MPa	Connection:	G1/2" (DN15)
Inlet:	Bottom or side inlet		

JST-013-1



- Vase Type
- No Installation

Power:	3,000 W	Voltage:	110 / 220 V
Element:	Stainless steel	Product size:	150 × 90 × 130 mm
Pack size:	150 × 90 × 130 mm	Carton:	40 pcs / 620 × 465 × 290 mm
Unit wt:	1 kg	IP:	IPX4
Pressure:	0.15 - 0.6 MPa	Connection:	G1/2" (DN15)
Inlet:	Bottom inlet		

JST-015



- LED Ring Display
- Bottom or Side Inlet

Power:	3,000 W	Voltage:	110 / 220 V
Element:	Stainless steel	Product size:	210 × 108 × 265 mm
Pack size:	210 × 108 × 265 mm	Carton:	24 pcs / 675 × 440 × 550 mm
Unit wt:	1.3 kg	IP:	IPX4
Pressure:	0.15 - 0.6 MPa	Connection:	G1/2" (DN15)
Inlet:	Bottom or side inlet		

JST-015-1



- Compact LED Display
- Bottom or Side Inlet

Power:	3,000 W	Voltage:	110 / 220 V
Element:	Stainless steel	Product size:	150 × 100 × 209 mm
Pack size:	150 × 100 × 209 mm	Carton:	30 pcs / 460 × 460 × 440 mm
Unit wt:	1.1 kg	IP:	IPX4
Pressure:	0.15 - 0.6 MPa	Connection:	G1/2" (DN15)
Inlet:	Bottom or side inlet		

JST-019



- 360° Rotating Spout
- Bottom Inlet

Power:	3,000 W	Voltage:	110 / 220 V
Element:	Stainless steel	Product size:	210 × 108 × 265 mm
Pack size:	210 × 108 × 265 mm	Carton:	24 pcs / 675 × 440 × 590 mm
Unit wt:	1.2 kg	IP:	IPX4
Pressure:	0.15 - 0.6 MPa	Connection:	G1/2" (DN15)
Inlet:	Bottom inlet		

JST-022



- Slim Chrome Body
- Bottom Inlet

Power:	3,000 W	Voltage:	110 / 220 V
Element:	Stainless steel	Product size:	210 × 108 × 265 mm
Pack size:	210 × 108 × 265 mm	Carton:	24 pcs / 675 × 440 × 590 mm
Unit wt:	1.2 kg	IP:	IPX4
Pressure:	0.15 - 0.6 MPa	Connection:	G1/2" (DN15)
Inlet:	Bottom inlet		

JST-HS001



- With Hand Shower Set
- Bottom or Side Inlet

Power:	3,000 W	Voltage:	110 / 220 V
Element:	Stainless steel	Product size:	210 × 108 × 265 mm
Pack size:	210 × 108 × 265 mm	Carton:	24 pcs / 675 × 440 × 610 mm
Unit wt:	1.3 kg	IP:	IPX4
Pressure:	0.15 - 0.6 MPa	Connection:	G1/2" (DN15)
Inlet:	Bottom or side inlet		

JST-HS007



- Hand Shower Set
- Temperature Display

Power:	3,000 W	Voltage:	110 / 220 V
Element:	Stainless steel	Product size:	210 × 108 × 265 mm
Pack size:	210 × 108 × 265 mm	Carton:	24 pcs / 675 × 440 × 610 mm
Unit wt:	1.3 kg	IP:	IPX4
Pressure:	0.15 - 0.6 MPa	Connection:	G1/2" (DN15)
Inlet:	Bottom or side inlet		

JST-HS013



- Hand Shower Set
- White Body

Power:	3,000 W	Voltage:	110 / 220 V
Element:	Stainless steel	Product size:	210 × 108 × 265 mm
Pack size:	210 × 108 × 265 mm	Carton:	24 pcs / 675 × 440 × 610 mm
Unit wt:	1.3 kg	IP:	IPX4
Colours:	White	Pressure:	0.15 - 0.6 MPa
Connection:	G1/2" (DN15)	Inlet:	Bottom or side inlet

JST-ZSW-D02



- Premium Kitchen Model
- Bottom Inlet

Power:	3,000 W	Voltage:	110 / 220 V
Element:	Stainless steel	Product size:	210 × 108 × 265 mm
Pack size:	210 × 108 × 265 mm	Carton:	24 pcs / 675 × 440 × 590 mm
Unit wt:	1.2 kg	IP:	IPX4
Pressure:	0.15 - 0.6 MPa	Connection:	G1/2" (DN15)
Inlet:	Bottom inlet		

JST-ZSW-D03



- No Installation
- Digital Display

Power:	3,000 W	Voltage:	110 / 220 V
Element:	Stainless steel	Product size:	210 × 108 × 265 mm
Pack size:	210 × 108 × 265 mm	Carton:	24 pcs / 675 × 440 × 570 mm
Unit wt:	1.1 kg	IP:	IPX4
Pressure:	0.15 - 0.6 MPa	Connection:	G1/2" (DN15)
Inlet:	Bottom inlet		

JST-ZSWK-D02




- Stainless Steel
- Bottom Inlet

Power:	3,300 W	Voltage:	110 / 220 V
Element:	Stainless steel	Product size:	350 × 108 × 320 mm
Pack size:	350 × 108 × 320 mm	Carton:	12 pcs / 590 × 360 × 650 mm
Unit wt:	1.6 kg	IP:	IPX4
Pressure:	0.15 - 0.6 MPa	Connection:	G1/2" (DN15)
Inlet:	Bottom inlet		

Bathroom & Desk Heaters


B1

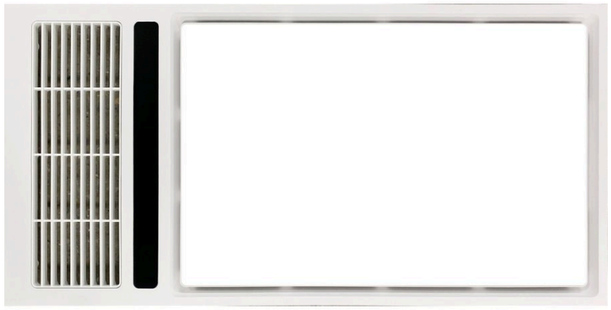

- Light
- Ventilation

Power:	2,450 W	Voltage:	220 V
Product size:	300 × 600 × 85 mm	Carton:	650 × 200 × 360 mm
Unit wt:	2.9 kg	IP:	IPX2
Colours:	White	Functions:	Light · ventilation · blow · heat
Control:	Four-key piano switch	Cut-out:	300 × 600 mm
Lighting:	18 W LED		

B2

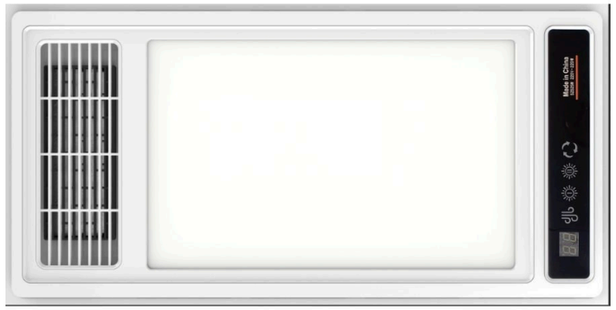

Power:	2,700 W	Voltage:	220 V
Product size:	300 × 600 × 85 mm	Carton:	650 × 195 × 410 mm
Unit wt:	3.5 kg	IP:	IPX2
Colours:	White	Functions:	Light · ventilation · blow · weak heat · strong heat
Control:	Five-key piano switch with digital display	Cut-out:	300 × 600 mm
Lighting:	20 W LED		

B3



Power:	2,900 W	Voltage:	220 V
Product size:	300 × 600 × 85 mm	Carton:	650 × 195 × 410 mm
Unit wt:	3.5 kg	IP:	IPX2
Colours:	White	Functions:	Heat · ventilation · blow · drying · purification · light
Control:	8-key wireless remote · digital display · child lock	Cut-out:	300 × 600 mm
Lighting:	24 W LED		

B4



Power:	3,000 W	Voltage:	220 V
Product size:	300 × 600 × 107 mm	Carton:	660 × 220 × 370 mm
Unit wt:	3.8 kg	IP:	IPX2
Colours:	White	Functions:	Heat · light · night light · ventilation · fresh air · drying · thermostat · plasma sterilisation
Control:	9-key wireless remote · digital display · auto-swing louvres	Cut-out:	300 × 600 mm
Lighting:	24 W LED + night light		

C1



- Rotary Knob
- Three Modes
- Bathroom or Bedroom
- Wall or desk mounting

Power:	2,000 W	Voltage:	220 V
Product size:	280 × 280 × 80 mm	Carton:	340 × 140 × 433 mm
Unit wt:	2.3 kg	IP:	IPX2
Colours:	White	Control:	Rotary knob

C2



- Touch Panel
- Digital Display & 90-Minute Timer
- Wall or desk mounting
- No drilling

Power:	2,000 W	Voltage:	220 V
Product size:	280 × 280 × 80 mm	Carton:	340 × 140 × 433 mm
Unit wt:	2.3 kg	IP:	IPX2
Colours:	White	Control:	Touch panel · digital display

C3



- UV Sterilisation

Power:	2,600 W	Voltage:	220 V
Product size:	600 × 120 × 120 mm	Carton:	565 × 420 × 510 mm
Unit wt:	2.7 kg	IP:	IPX2
Colours:	White	Functions:	Heat · dry · sterilise · timer · swing towel rail
Control:	Touch panel · remote control · body sensor		

C7



- Towel Rail
- Plasma Sterilisation & Swing Airflow

Power:	2,200 W	Voltage:	220 V
Product size:	450 × 300 × 100 mm	Carton:	528 × 191 × 415 mm
Unit wt:	3.6 kg	IP:	IPX2
Colours:	White	Functions:	Heat · dry · blow · sterilise · timer · towel rail
Control:	Touch panel		

D1



- Wall-Mounted Twin-Lamp Unit
- Heat lamps
- Two 275 W golden quartz lamps
- Instant radiant heat over the bath or shower

Power:	550 W	Voltage:	220 V
Product size:	400 × 200 × 180 mm	Carton:	435 × 240 × 250 mm
Unit wt:	1.1 kg	IP:	IPX2
Colours:	Gold, White	Control:	Rocker switches

D2



- Wall-Mounted Three-Lamp Unit
- Heat lamps
- Three 275 W red quartz lamps
- 825 W of radiant heat

Power:	825 W	Voltage:	220 V
Product size:	500 × 250 × 220 mm	Carton:	545 × 280 × 265 mm
Unit wt:	1.54 kg	IP:	IPX2
Colours:	Red, White	Control:	Rocker switches

D3



- Twin Lamps with Fan Heater and LED Display
- 1,100 W total
- 220 V ~ 50 Hz

Power:	1,100 W	Voltage:	220 V
Product size:	380 × 210 × 160 mm	Carton:	420 × 240 × 210 mm
Unit wt:	1.89 kg	IP:	IPX2
Colours:	White		

D4



- Wall-Mounted Five-Lamp Unit
- Heat lamps
- Five 275 W golden quartz lamps
- 1,375 W of radiant heat

Power:	1,375 W	Voltage:	220 V
Product size:	440 × 300 × 180 mm	Carton:	470 × 300 × 345 mm
Unit wt:	1.93 kg	IP:	IPX2
Colours:	Gold, White	Control:	Rocker switches

D5



- Four Lamps with Central Fan Heater
- 1,650 W total
- Push-button control
- 220 V ~ 50 Hz

Power:	1,650 W	Voltage:	220 V
Product size:	440 × 300 × 180 mm	Carton:	470 × 300 × 345 mm
Unit wt:	2.27 kg	IP:	IPX2
Colours:	White	Control:	Push-button panel

D6



- Four Heat Lamps
- Light and Ventilation
- 1,135 W total
- 220 V ~ 50 Hz

Power:	1,135 W	Voltage:	220 V
Product size:	300 × 300 × 100 mm	Carton:	415 × 240 × 380 mm
Unit wt:	2.5 kg	IP:	IPX2
Colours:	White		

D7



- Four Heat Lamps
- Light and Ventilation
- 1,145 W total
- 220 V ~ 50 Hz

Power:	1,145 W	Voltage:	220 V
Product size:	600 × 300 × 100 mm	Carton:	660 × 240 × 365 mm
Unit wt:	3 kg	IP:	IPX2

D8



- Heating
- Light
- Ventilation and Blow
- Fan heater

Power:	2,450 W	Voltage:	220 V
Product size:	300 × 300 × 100 mm	Carton:	340 × 235 × 347 mm
Unit wt:	2.2 kg	IP:	IPX2
Colours:	White		

D9



- Digital Display
- Heating
- Light
- Ventilation and Blow

Power:	2,450 W	Voltage:	220 V
Product size:	350 × 350 × 100 mm	Carton:	415 × 220 × 430 mm
Unit wt:	2.4 kg	IP:	IPX2